



ADDENDUM NO. 1
CONTRACT DOCUMENTS AND TECHNICAL SPECIFICATIONS
September 1, 2026

PROJECT: New 2.0 MG Ground Storage Tank at Fire Tower Rd (Brogdon)
Calhoun Project No.: 358
OWNER: City of Calhoun
BID DATE: Friday, September 4, 2026 at 10:00 a.m.
TO: All Bidders

1. CONTRACT DOCUMENTS, BID FORM, Page 00400-2, §1.5C.1 - Verification of Addenda Issuance:

It is the responsibility of the Bidder to verify that they have received all addenda in respect to the project bid. It is recommended that the Bidder contact Calhoun's project engineer (who is handling this bid) no later than 48 hours before the bid time to confirm the total number of addenda issued. Kurt T. McCord has been assigned the project engineer role and can be reached at (706) 602-6082 (office).

All Bidders are responsible for indicating acknowledgement of each addendum issued with addendum number and date, where noted in the bid form. **Failure to acknowledge all addenda in the bid form could constitute an incomplete and non-conforming bid which may or may not be read aloud.**

2. CONTRACT DOCUMENTS, BID FORM, Page 00400-5 – Alternative Bid Item:

Base bid items will remain unchanged by this addendum. However, the Owner wishes to obtain add-on pricing for the Internal Tank Overflow and 12" Rubber Check Valve that were eliminated in the rebid modifications dated August 3, 2026. Contractor shall reference the strike-through details on Plan Sheets 6 and 7. A plan view depiction has also been attached to this document. **A revised bid form will not be issued.** Contractor should hand-write prices at the bottom of the "Alternate Bid Item" spreadsheet on page 00400-5 using the format below.

Item	Qty	Unit	Description	Unit Price	Total Price
A24	1	LS	12" DIP Internal Tank Overflow Assembly		
A25	1	EA	12" Rubber Check Valve		

3. CONTRACT DOCUMENTS, MEASUREMENT AND PAYMENT, Page 01025-15,16 – Miscellaneous Work Items:



The following paragraphs shall be included under the Measurement and Payment section in their respective order. Any work beyond the 12" DI 90° bend (portions outside the tank) should be excluded for the lump sum price. Instead,

those items will be eligible for payment using line items already established in the base bid (i.e. Item #13, 14, 15, 18, and 32).

“7. Internal Tank Overflow: Measurement of the 12” DIP overflow assembly shall be measured on a lump sum basis. More specifically, the bid item should include the interior flanged ductile iron piping, flared fitting, 90° bend, ceramic epoxy coating, pipe brackets, and concrete encasement.”

“7. Internal Tank Overflow: Payment for the 12” DIP internal overflow should cover all labor, equipment, and materials needed to safely and securely install the assembly as detailed in the drawings, if the Owner decides to select this optional add-on.”

END ADDENDUM NO. 1

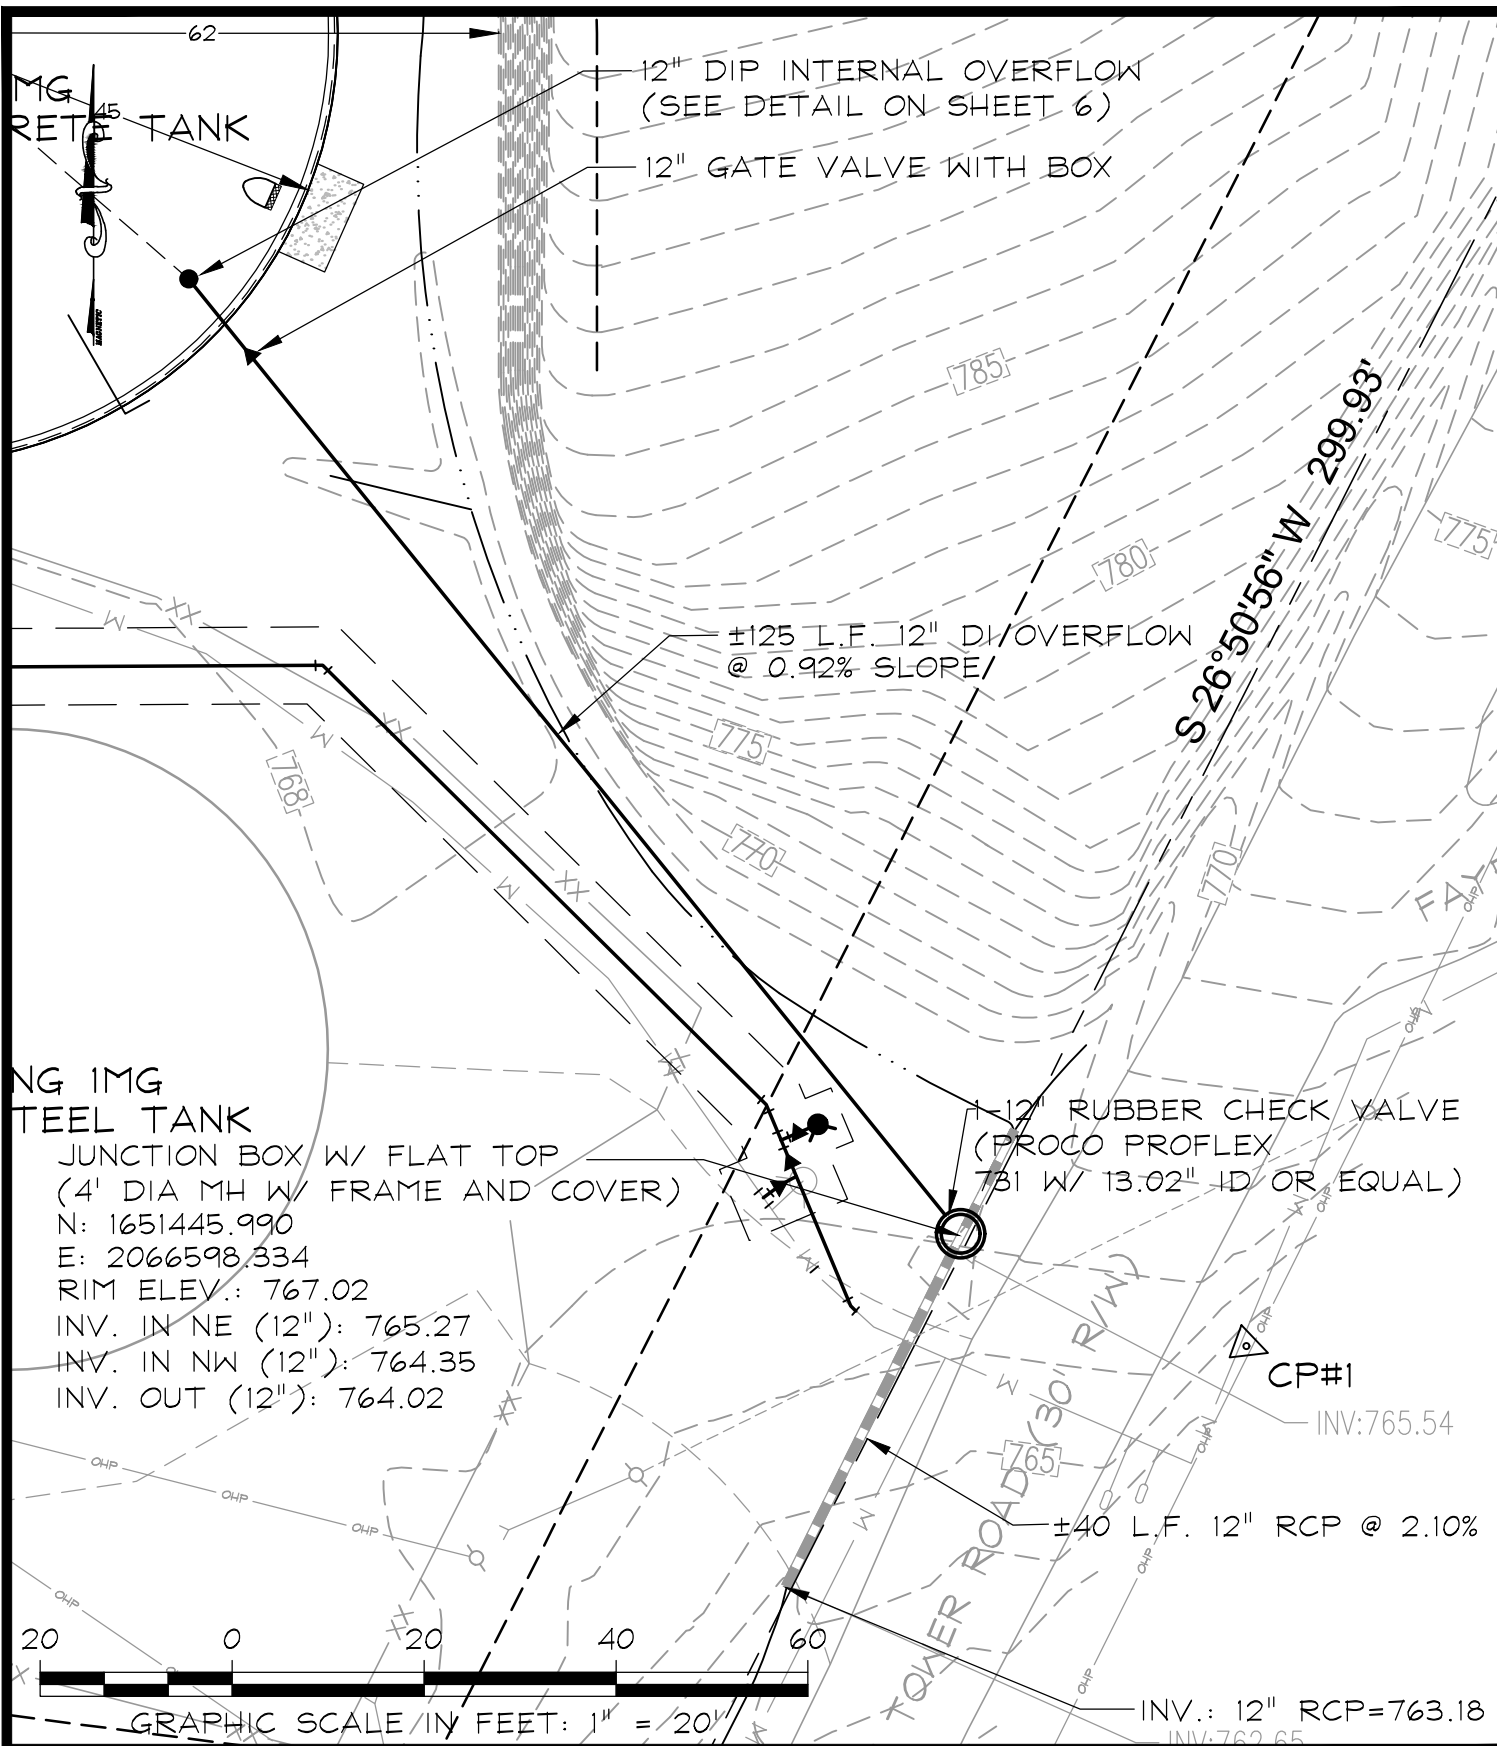

CITY OF CALHOUN
UTILITIES ENGINEERING
CALHOUN, GEORGIA 30701
PHONE: (706) 629-4701

NEW FIRE TOWER ROAD (BROGDON)
2MG GROUND STORAGE TANK
FOR THE
CITY OF CALHOUN
GORDON